

ThermoBoost VF3 High Environmental Value (HVE)

HEATING SYSTEM FOR THE ANTIFREEZE TOWER / WIND MACHINE:

V1 - V1F - V2 - V3 - P1 - MK850 - MK1 - MKe



-4°

Protection
temperature
WITHOUT HEATING

-7°


Protection
temperature
WITH HEATING

MATERIAL >
Refractory Steel

4 HEATING POSITIONS FOR 4 POWER LEVELS >

- > 200 kW / hour
- > 400 kW / hour
- > 600 kW / hour
- > 800 kW / hour

BURNER X3 > Pellet

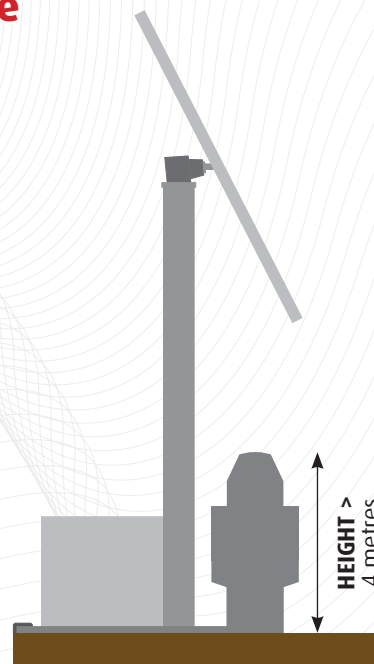

Adaptable to all brands of machines

- 1** IN ORDER TO BENEFIT FROM THERMAL INVERSION, the tower must be put into operation when the temperature is still positive between +0,5° and +1,5° (wet temperature).
- 2** The use of heater when the temperature reaches the critical point, allows an increase to +2°C of the temperature of the protected area.
- 3** With black frost, without thermal inversion, the use of the tower with an external heat source is essential.